




CONTROL BOX

SD510



A COMPLETE AND EASY TO INSTALL CONTROL BOX

- **Adapts to all configurations** thanks to many functionalities:
 - Metallic curtains, sectional doors or rapid doors
 - Motors with mechanical or electronic end limits
- Disconnectable terminals and dedicated entries to security devices make it **easy to plug**
- **Easy to program:** 3 different configurations of pre-programmed functions (depending on operation mode and type of safety edge) simplify the first power up. 2 levels of programming (level 1 and expert) allow then to personalise.

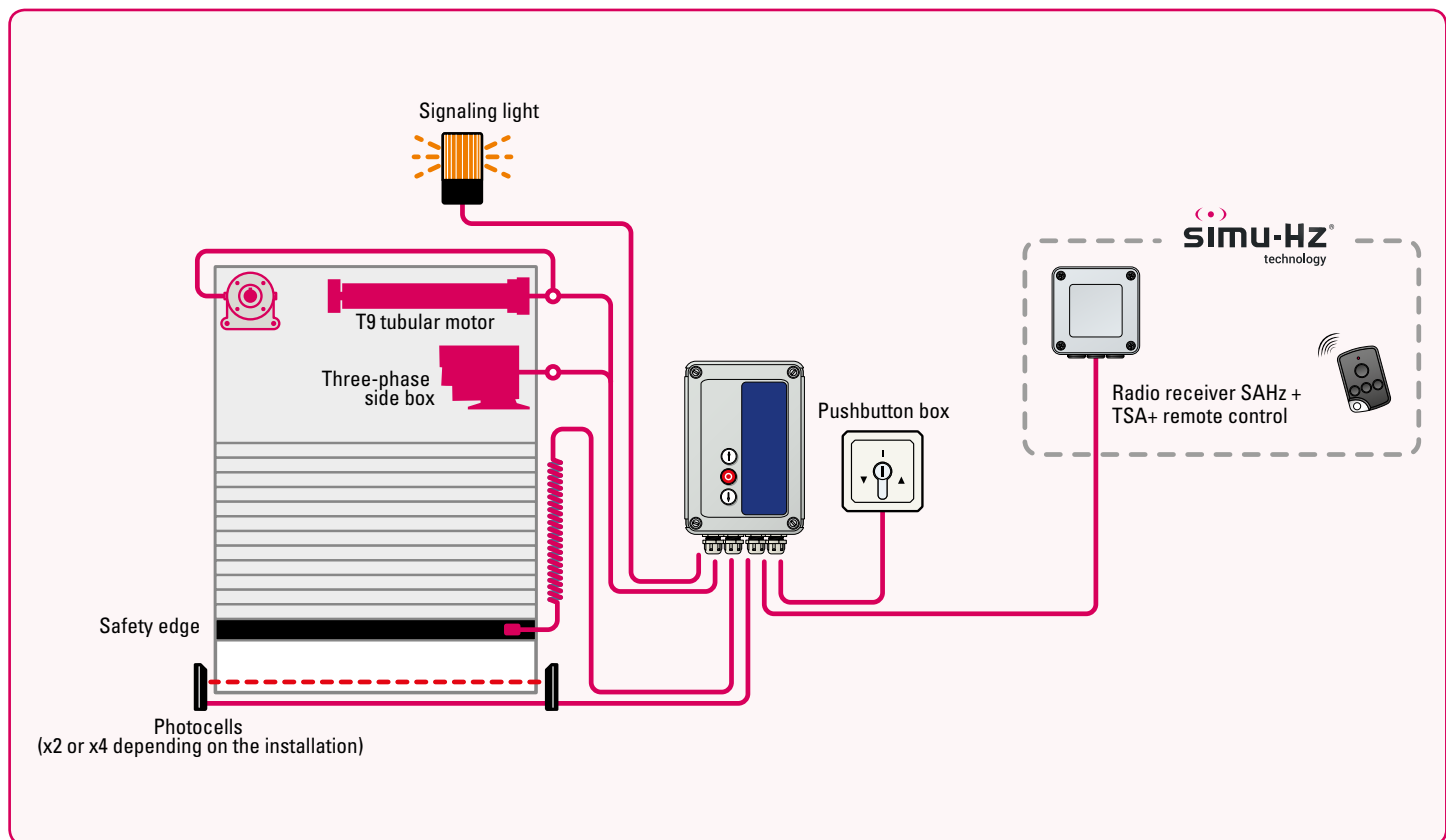

TECHNICAL DATAS

LCD SCREEN

3 PUSH BUTTONS IN FRONT up - stop - down

VOLTAGE SUPPLY Three Phase 400V + N 50/60Hz
Three Phase 230V 50/60Hz

MOTOR POWER OUTPUT Three phase 2.2KW / 400VAC
Three phase 1.5KW / 230VAC


ACCESORY SUPPLY 24 VDC / 0.5A

MAXIMUM POWER CONSUMPTION 250mA / 230VAC (not including 230VAC external loads)

PROTECTION INDEX IP54

WEIGHT 1kg

DISCONNECTABLE TERMINALS

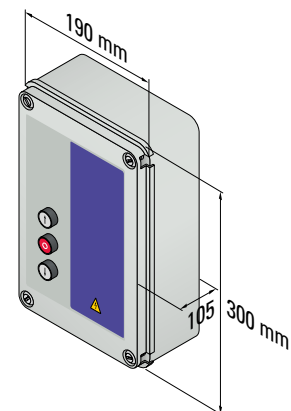

DESCRIPTION	REFERENCE
SD510	2008779