ELECTRONIC PRODUCT FORM

18/10/00	DMKI-FPTE 709657R0

designation	**CENTRALIS uno IB**
reference	**709657**
range	**INTEO**

FUNCTIONS

The **CENTRALIS UNO IB** is an individual control of AC motor with link to master control.

The **CENTRALIS uno/IB** is compatible with the SOMFY “IB” BUS line (common = +V).

The **CENTRALIS uno/IB** has an Integrated switch to disable the master commands.
“auto” position : the local and the master “commands” from the BUS line are taken into account.
“0” position : Only the local commands are taken into account and the master commands which come from the BUS line are disabled. Then, to force the control of the CENTRALIS uno IB from the BUS line, the command should be longer than 2 sec.
The LED lights on in red when a command longer than 2 sec. is given on the BUS line.

Possibility to set one or two intermediate positions.

TECHNICAL SPECIFICATIONS

Box	Material	PC
	Color	white / grey
	Size	80 x 80 x 50 mm
	Protection factor against solid and splashproof	IP 40
		Class II product
Supply	nominal	230 V~
	limits	207-253 V~
	Frequency	50 - 60 Hz
Output		~230V 3A cosf 0,8
Output temporisation		180s
BUS line	IB Bus	20V DC
Standards		EN60730 EN55081 EN55082
Temperature range	Storage	-15°C at +45°C
	Working (in house in dry rooms)	+5°C at +40°C
Connectors		screws / socket
CE requirements		Yes

DIMENSIONS

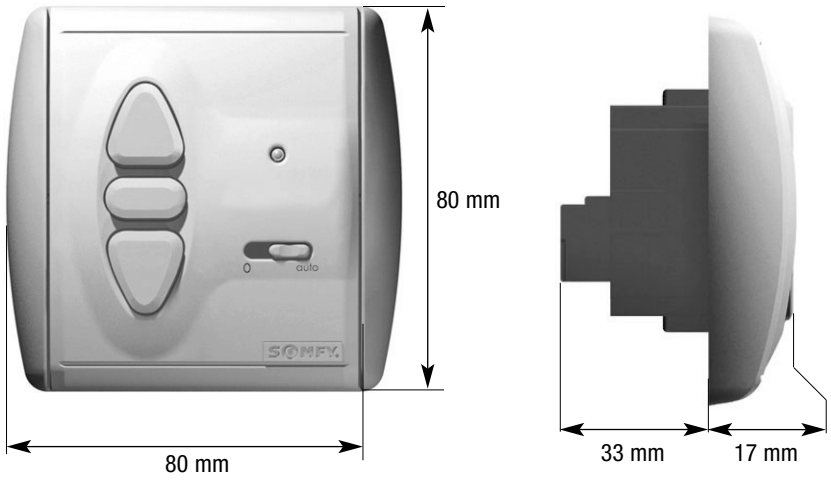

COMPATIBILITIES AT THE 18/10/00

Input :
Centralis IB
Chronis IB
Soliris IB

Output :
Group control boxes 130150, 128617-3 and ML30000.
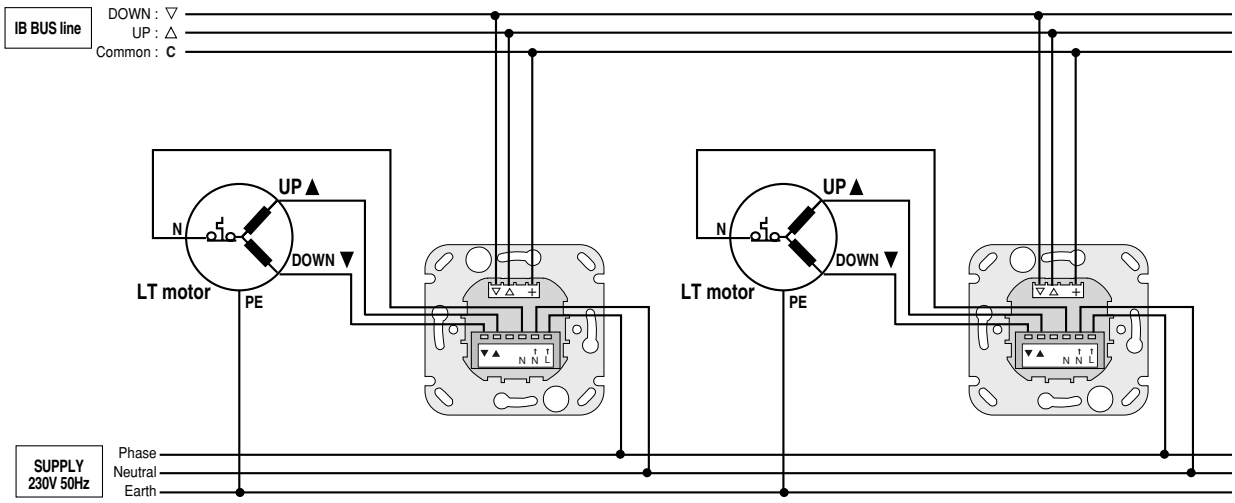
WIRING