


concept 25

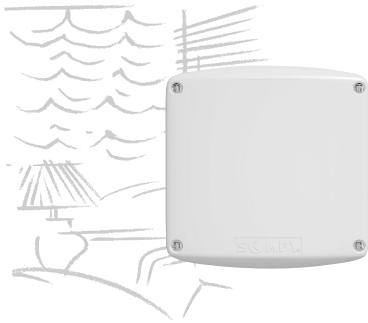

**POWER 2.5 DC RTS**  
RTS receiver with Power Supply

## **POWER 2.5 DC RTS**

230 VAC / 24 VDC RTS receiver

- power supply with built-in RTS receiver
- group control
- drives up to 4 LW25 - B83

Adapted for all applications

- for lift / tilt applications, easy to program :
  - adjustable tilting speed
  - automatic slat opening at any level of the window
  - intermediate position
- for lift only applications, easy to program :
  - two intermediate positions
- box especially designed for interior applications

Safe installation

- protected against short circuit
- protected by thermic switch


Easy to program

- same ergonomics for all Inteo DC products
- visual feedback after each programming recording


Easy to use with:

- TELIS 1 OR 4 RTS Remote control
- CENTRALIS RTS Individual / Group control
- CHRONIS RTS Timer individual / Group control
- CHRONIS RTS LIGHT - Timer individual / Group control

## **POWER 2.5 DC RTS**




**Roller Blinds**




**Venetian Blinds**


- Aluminium
- Wood



**Pleated Blinds**



**Cellular Blinds**



**Roman Blinds**



## POWER 2.5 DC RTS

Radio Technology Somfy™

TECHNICAL DATA	POWER 2.5 DC RTS
Nominal supply voltage (vdc)	230
Minimum supply voltage (vdc)	196
Maximum supply voltage (vdc)	254
Voltage drop in device (vdc)	0.3
maximum current rating (A)	2.5
Current consumption at 24V (mA)	18
Output temporisation	3 min.
Input and output screw terminals for wires (mm <sup>2</sup> )	2.5
Dielectric strength	4000 V
Working temperature	-5 to 55°C
Internal used only	
Protection index	IP 20
Standards	EN60730
Net Weight (g)	500
Size (without antenna)	150 x 150 x 50

