



#### SIMU'S NEW SIGNATURE OF CONTROLS

- **A simple design:** clean, straight lines and a flat surface give these transmitters a timeless and universal appeal.
- **The favourite position button** has been moved in order to emphasise it and make this comfort function more evident. Simply pressing down the favourite position button allows the user to find their favorite brightness level.
- **A choice of 6 colours, with a matt finish:** a range of subtle and contemporary colours, with a matt finish that highlights the purity of the colour and adapts to all styles.
- **A complete range:** available in a wall version (COLOR+), remote control with 1 channel (COLOR+1) or 5 channels (COLOR+5), these transmitters can control all SIMU-Hz motors and carry out all types of command: individual, in zones or centralised.

## COLOR+ WALL TRANSMITTERS



White



Metallic grey



Anthracite



Mocha



Blackcurrant



Blue

### COLOUR COMBINATIONS:

Face plate and frame colours can be combined by ordering the frames separately in order to create transmitters that are personalised according to the users' wishes.



## SPECIFICATIONS


LED light showing a command has been sent

Up button

Down button

Button: favourite position\* / stop

\* If the motor being controlled is compatible with this function.



<b>PRODUCT CLASS</b>	class III
<b>POWER SUPPLY</b>	3V - type CR2430 battery
<b>AMBIENT TEMPERATURE OF USE</b>	
from +0°C to +60°C	
<b>PROTECTION INDEX</b>	
IP 30	
<b>RANGE</b>	
~ 200 m in free field	
~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)	
<b>RADIO FREQUENCY COMPATIBILITY</b>	
433,42 MHz Hz Motors and external receivers	




## ASSEMBLY

- 1**  
ATTACH THE BRACKET TO THE WALL

- 2**  
CLIP THE FRAME TO THE BRACKET

- 3**  
\* CLIP THE MODULE TO THE FRAME

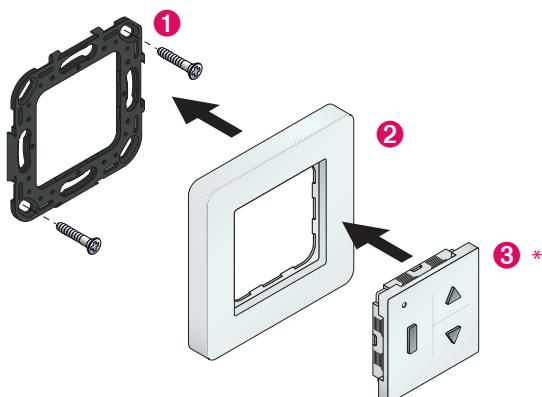

\* Module also compatible with other electrical device frames available on the market. Please ask us.

## COLOR+ 1 & COLOR+ 5 REMOTE CONTROLS



## SPECIFICATIONS


**COLOR+ 1 - (1 channel)**

Up button  
favourite position\* / stop  
Down button  
LED light showing a command has been sent  
**simu**

**COLOR+ 5 - (5 channels)**

Up button  
favourite position\* / stop  
Down button  
LED light showing a command has been sent + display of the channel being used  
Channel selection button  
**simu**

\* If the motor being controlled is compatible with this function.

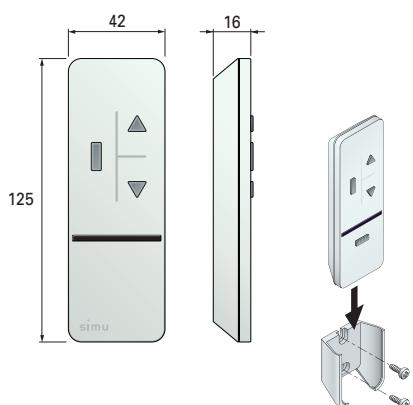

<b>PRODUCT CLASS</b>	class III
<b>POWER SUPPLY</b>	3V - type CR2430 battery
<b>AMBIENT TEMPERATURE OF USE</b>	from +0°C to +60°C
<b>PROTECTION INDEX</b>	IP 30
<b>RANGE</b>	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)
<b>RADIO FREQUENCY</b>	433,42 MHz
<b>COMPATIBILITY</b>	Hz Motors and external receivers



## REFERENCES

WALL TRANSMITTER	COLOUR	REFERENCE	PACKAGING
	White	<b>2008194</b>	x 1
	White	<b>2008195</b>	x 10
	White	<b>2008196</b>	x 100
	Metallic grey	<b>2008197</b>	x 1
	Anthracite	<b>2008198</b>	x 1
	Mocha	<b>2008199</b>	x 1
	Blackcurrant	<b>2008200</b>	x 1
	Blue	<b>2008201</b>	x 1

SINGLE FRAME	COLOUR	REFERENCE	PACKAGING
	White	<b>9017805</b>	x 1
	Metallic grey	<b>9017806</b>	x 1
	Anthracite	<b>9017807</b>	x 1
	Mocha	<b>9017808</b>	x 1
	Blackcurrant	<b>9017809</b>	x 1
	Blue	<b>9017810</b>	x 1

1 CHANNEL REMOTE CONTROL	COLOUR	REFERENCE	PACKAGING
	White	<b>2008202</b>	x 1
	Metallic grey	<b>2008203</b>	x 1
	Anthracite	<b>2008204</b>	x 1
	Mocha	<b>2008205</b>	x 1
	Blackcurrant	<b>2008206</b>	x 1
	Blue	<b>2008207</b>	x 1

5 CHANNELS REMOTE CONTROL	COLOUR	REFERENCE	PACKAGING
	White	<b>2008208</b>	x 1
	Metallic grey	<b>2008209</b>	x 1
	Anthracite	<b>2008210</b>	x 1
	Mocha	<b>2008211</b>	x 1
	Blackcurrant	<b>2008212</b>	x 1
	Blue	<b>2008213</b>	x 1

All these transmitters are supplied with batteries and wall bracket (screws not supplied).