

SIMU'S NEW SIGNATURE OF CONTROLS

- **A simple design:** clean, straight lines and a flat surface give these transmitters a timeless and universal appeal.
- **The favourite position button** has been moved in order to emphasise it and make this comfort function more evident. Simply pressing down the favourite position button allows the user to find their favorite brightness level.
- **A choice of 6 colours, with a matt finish:** a range of subtle and contemporary colours, with a matt finish that highlights the purity of the colour and adapts to all styles.
- **A complete range:** available in a wall version (COLOR+), remote control with 1 channel (COLOR+1) or 5 channels (COLOR+5), these transmitters can control all SIMU-Hz motors and carry out all types of command: individual, in zones or centralised.

COLOR+ WALL TRANSMITTERS



White



Metallic grey



Anthracite



Mocha




Blackcurrant




Blue

COLOUR COMBINATIONS:


Face plate and frame colours can be combined by ordering the frames separately in order to create transmitters that are personalised according to the users' wishes.



SPECIFICATIONS

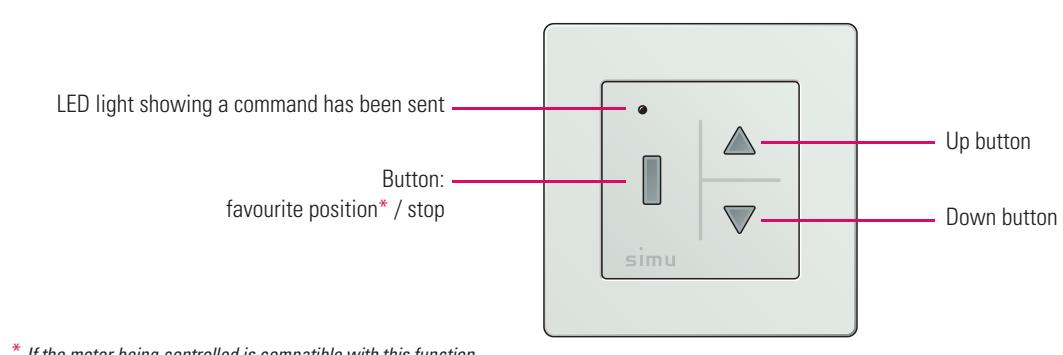

* If the motor being controlled is compatible with this function.



PRODUCT CLASS	class III
POWER SUPPLY	3V - type CR2430 battery
AMBIENT TEMPERATURE OF USE	from +0°C to +60°C
PROTECTION INDEX	IP 30
RANGE	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)
RADIO FREQUENCY COMPATIBILITY	433,42 MHz Hz Motors and external receivers




ASSEMBLY

- 1**
ATTACH THE BRACKET TO THE WALL

- 2**
CLIP THE FRAME TO THE BRACKET

- 3**
* CLIP THE MODULE TO THE FRAME

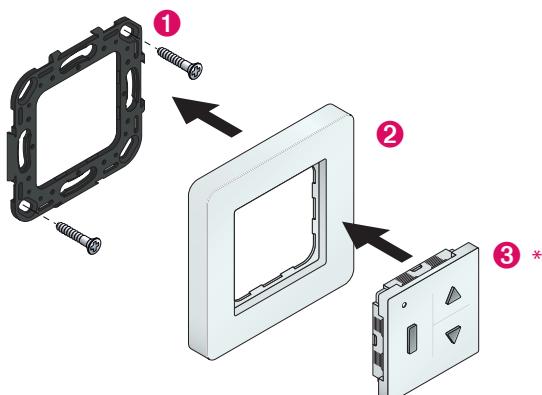

* Module also compatible with other electrical device frames available on the market. Please ask us.

COLOR+ 1 & COLOR+ 5 REMOTE CONTROLS



SPECIFICATIONS


COLOR+ 1 - (1 channel)

Up button
favourite position* / stop
Down button
LED light showing a command has been sent
simu

COLOR+ 5 - (5 channels)

Up button
favourite position* / stop
Down button
LED light showing a command has been sent + display of the channel being used
Channel selection button
simu

* If the motor being controlled is compatible with this function.

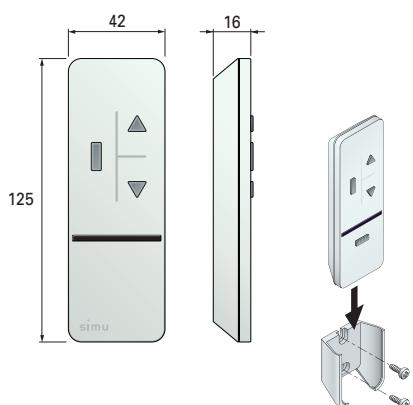

PRODUCT CLASS	class III
POWER SUPPLY	3V - type CR2430 battery
AMBIENT TEMPERATURE OF USE	from +0°C to +60°C
PROTECTION INDEX	IP 30
RANGE	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)
RADIO FREQUENCY	433,42 MHz
COMPATIBILITY	Hz Motors and external receivers



REFERENCES

WALL TRANSMITTER	COLOUR	REFERENCE	PACKAGING
	White	2008194	x 1
	White	2008195	x 10
	White	2008196	x 100
	Metallic grey	2008197	x 1
	Anthracite	2008198	x 1
	Mocha	2008199	x 1
	Blackcurrant	2008200	x 1
	Blue	2008201	x 1

SINGLE FRAME	COLOUR	REFERENCE	PACKAGING
	White	9017805	x 1
	Metallic grey	9017806	x 1
	Anthracite	9017807	x 1
	Mocha	9017808	x 1
	Blackcurrant	9017809	x 1
	Blue	9017810	x 1

1 CHANNEL REMOTE CONTROL	COLOUR	REFERENCE	PACKAGING
	White	2008202	x 1
	Metallic grey	2008203	x 1
	Anthracite	2008204	x 1
	Mocha	2008205	x 1
	Blackcurrant	2008206	x 1
	Blue	2008207	x 1

5 CHANNELS REMOTE CONTROL	COLOUR	REFERENCE	PACKAGING
	White	2008208	x 1
	Metallic grey	2008209	x 1
	Anthracite	2008210	x 1
	Mocha	2008211	x 1
	Blackcurrant	2008212	x 1
	Blue	2008213	x 1

All these transmitters are supplied with batteries and wall bracket (screws not supplied).