



COLOR+ RANGE

RADIO TRANSMITTERS



#### SIMU'S NEW SIGNATURE OF CONTROLS

- **A simple design:** clean, straight lines and a flat surface give these transmitters a timeless and universal appeal.
- **The favourite position button** has been moved in order to emphasise it and make this comfort function more evident. Simply pressing down the favourite position button allows the user to find their favorite brightness level.
- **A choice of 6 colours, with a matt finish:** a range of subtle and contemporary colours, with a matt finish that highlights the purity of the colour and adapts to all styles.
- **A complete range:** available in a wall version (COLOR+), remote control with 1 channel (COLOR+1) or 5 channels (COLOR+5), these transmitters can control all SIMU-Hz motors and carry out all types of command: individual, in zones or centralised.

## COLOR+ WALL TRANSMITTERS



White



Metallic grey



Anthracite



Mocha



Blackcurrant





Blue

### COLOUR COMBINATIONS:

Face plate and frame colours can be combined by ordering the frames separately in order to create transmitters that are personalised according to the users' wishes.




## SPECIFICATIONS

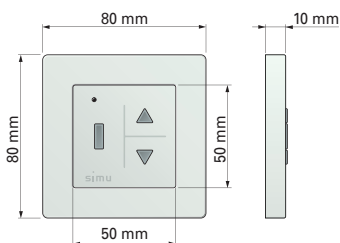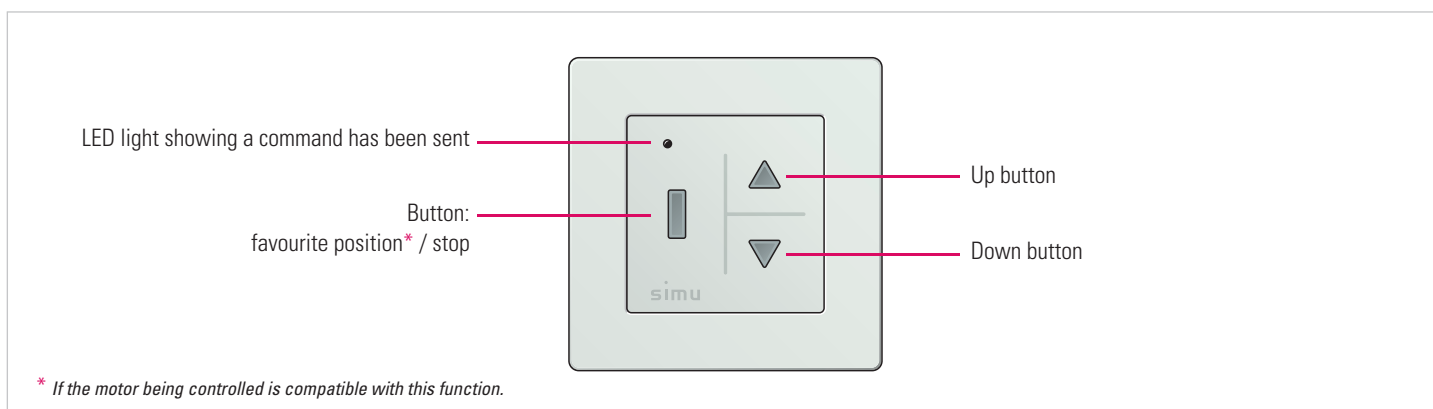


<b>PRODUCT CLASS</b>	class III
<b>POWER SUPPLY</b>	3V - type CR2430 battery
<b>AMBIENT TEMPERATURE OF USE</b>	from +0°C to +60°C
<b>PROTECTION INDEX</b>	IP 30
<b>RANGE</b>	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)
<b>RADIO FREQUENCY</b>	433,42 MHz
<b>COMPATIBILITY</b>	Hz Motors and external receivers





## ASSEMBLY

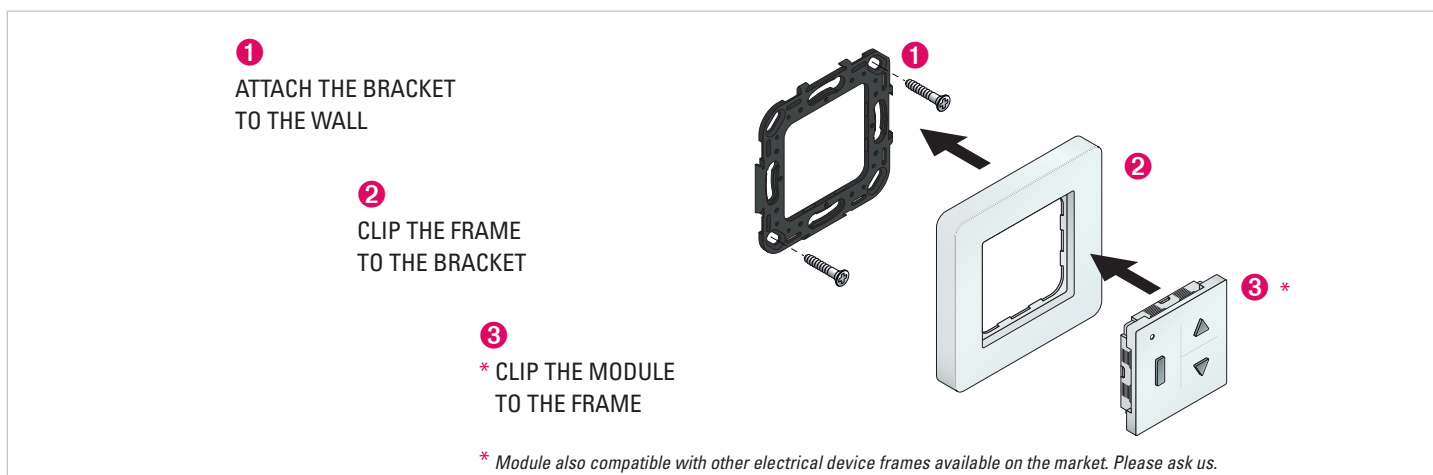

## COLOR+ 1 & COLOR+ 5 REMOTE CONTROLS

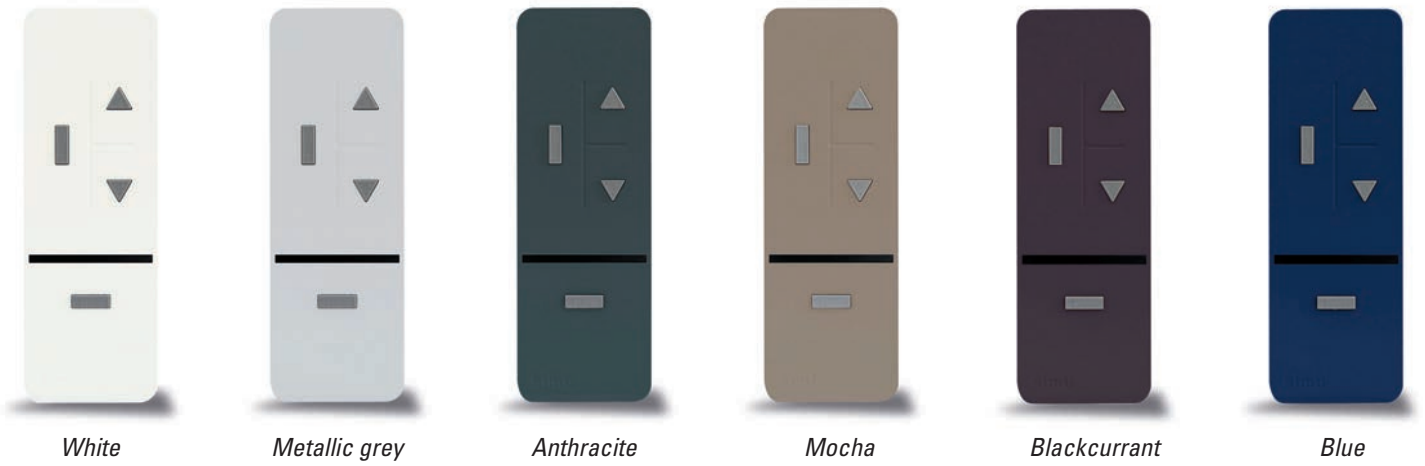


## SPECIFICATIONS

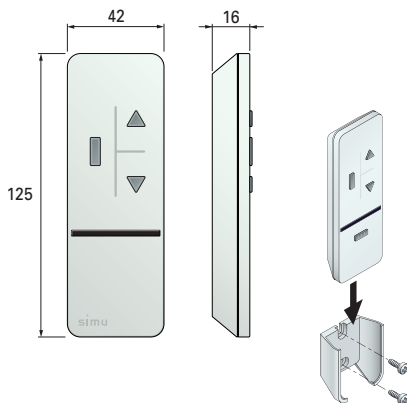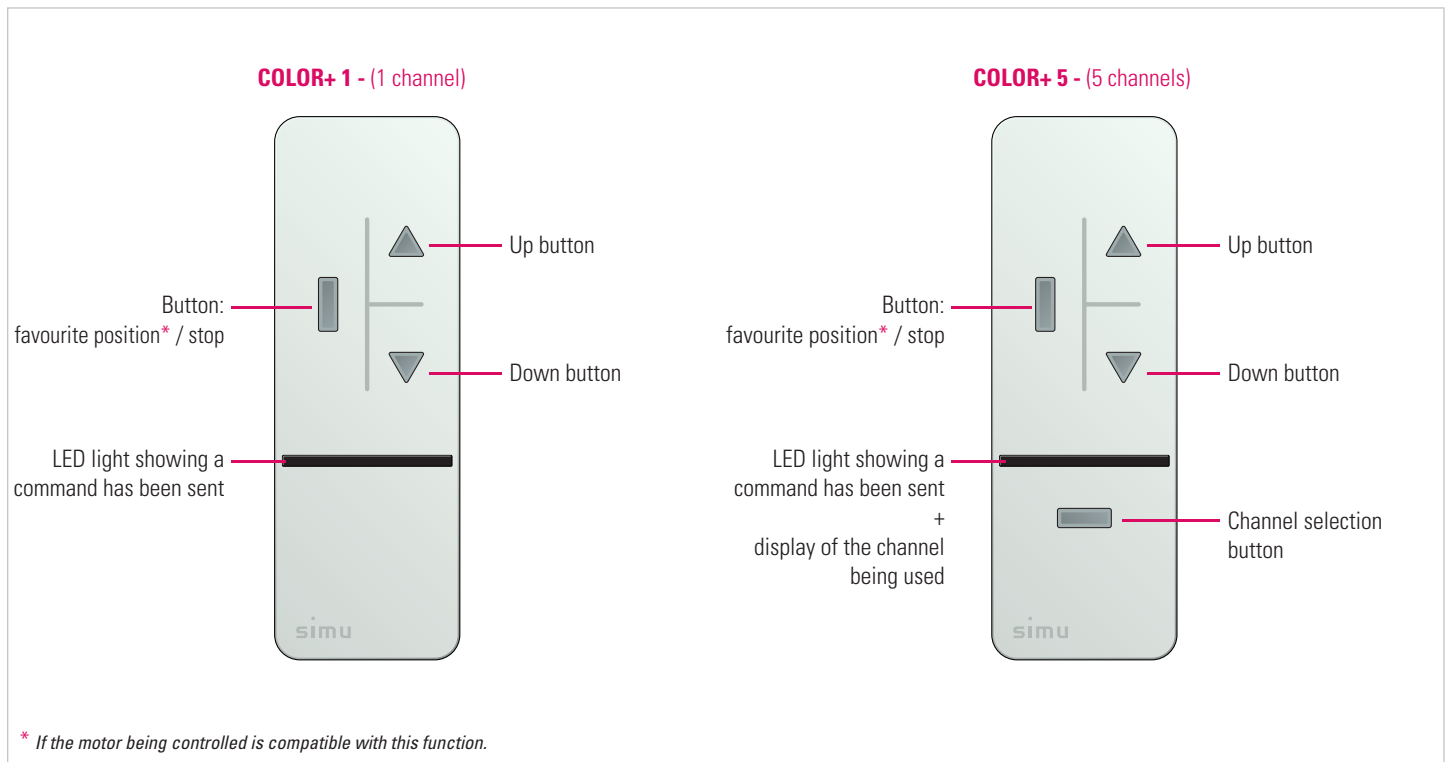

<b>PRODUCT CLASS</b>	class III
<b>POWER SUPPLY</b>	3V - type CR2430 battery
<b>AMBIENT TEMPERATURE OF USE</b>	from +0°C to +60°C
<b>PROTECTION INDEX</b>	IP 30
<b>RANGE</b>	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (depends on the environment and radio pollution)
<b>RADIO FREQUENCY</b>	433,42 MHz
<b>COMPATIBILITY</b>	Hz Motors and external receivers



## REFERENCES

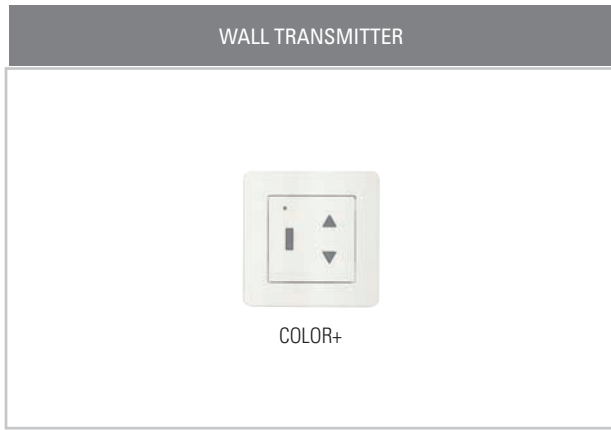

COLOUR	REFERENCE	PACKAGING
White	2008194	x 1
White	2008195	x 10
White	2008196	x 100
Metallic grey	2008197	x 1
Anthracite	2008198	x 1
Mocha	2008199	x 1
Blackcurrant	2008200	x 1
Blue	2008201	x 1



COLOUR	REFERENCE	PACKAGING
White	9017805	x 1
Metallic grey	9017806	x 1
Anthracite	9017807	x 1
Mocha	9017808	x 1
Blackcurrant	9017809	x 1
Blue	9017810	x 1



COLOUR	REFERENCE	PACKAGING
White	2008202	x 1
Metallic grey	2008203	x 1
Anthracite	2008204	x 1
Mocha	2008205	x 1
Blackcurrant	2008206	x 1
Blue	2008207	x 1



COLOUR	REFERENCE	PACKAGING
White	2008208	x 1
Metallic grey	2008209	x 1
Anthracite	2008210	x 1
Mocha	2008211	x 1
Blackcurrant	2008212	x 1
Blue	2008213	x 1

All these transmitters are supplied with batteries and wall bracket (screws not supplied).

