



09/02/2009

ALTEA ZIP

DMKI - FPTE

RANGE 1

ALTEA ZIP Range1R0

MOTOR: ALTEA ZIP 50 WT

Type of head	Round head
Nominal voltage	230 V - 50 Hz
Power supply tolerances	207 - 253V AC
Thermal time	4 minutes
Number of wires of the cable	4
Wire section	0,75 mm ²
Type of limit switch unit	Electronic
Capacity of the LSU	250 turns limited to 3 minutes of rotation without stop
System of protection	IP 44
Repeatability	< +/- 4°
Interface drawings	Wheel interface LT50 206821-Crown interface LT50 206822-Bracket interface LT50RH 206824 Screw implantation for LT50 RH mounting 206867
Basic crown for tube Ø	50 x 1,5 mm
Temperature working range	Normal use : -10°C to +40°C Exceptionnal use (20% of the life time not continuous) : -25°C to + 70°C
Noise level (accoustic power)	According to SOMFY measures (for information only).Worse value : in load up direction during 10 seconds.

	Nm	rpm		mm	mm	mm	mm	W	A	°C		kg	dBA
Designation	Nominal torque	Nominal speed	Reference	L1 max.	L2 (±3 mm)	L3 max.	tube	Rated power	Rated current	Thermal tripping	Brake type	Weight	Noise
ALTEA ZIP 50 WT RH 6/32	6	32	5060863	655	640	660	590	120	0,5	140	sliding	1,98	52
ALTEA ZIP 50 WT RH 15/32	15	32	5060864	675	660	680	610	240	1,1	150	sliding	2,54	56

Name
Date

R&D

Eric Sermet

16/02/2009

QUALITY

Xavier Colet


17/02/2009

MARKETING

Olivier Miesch

16/02/2009

WIRING	Neutral	Blue
	Direction 1	Brown
	Direction 2	Black
	Earth	Yellow / Green

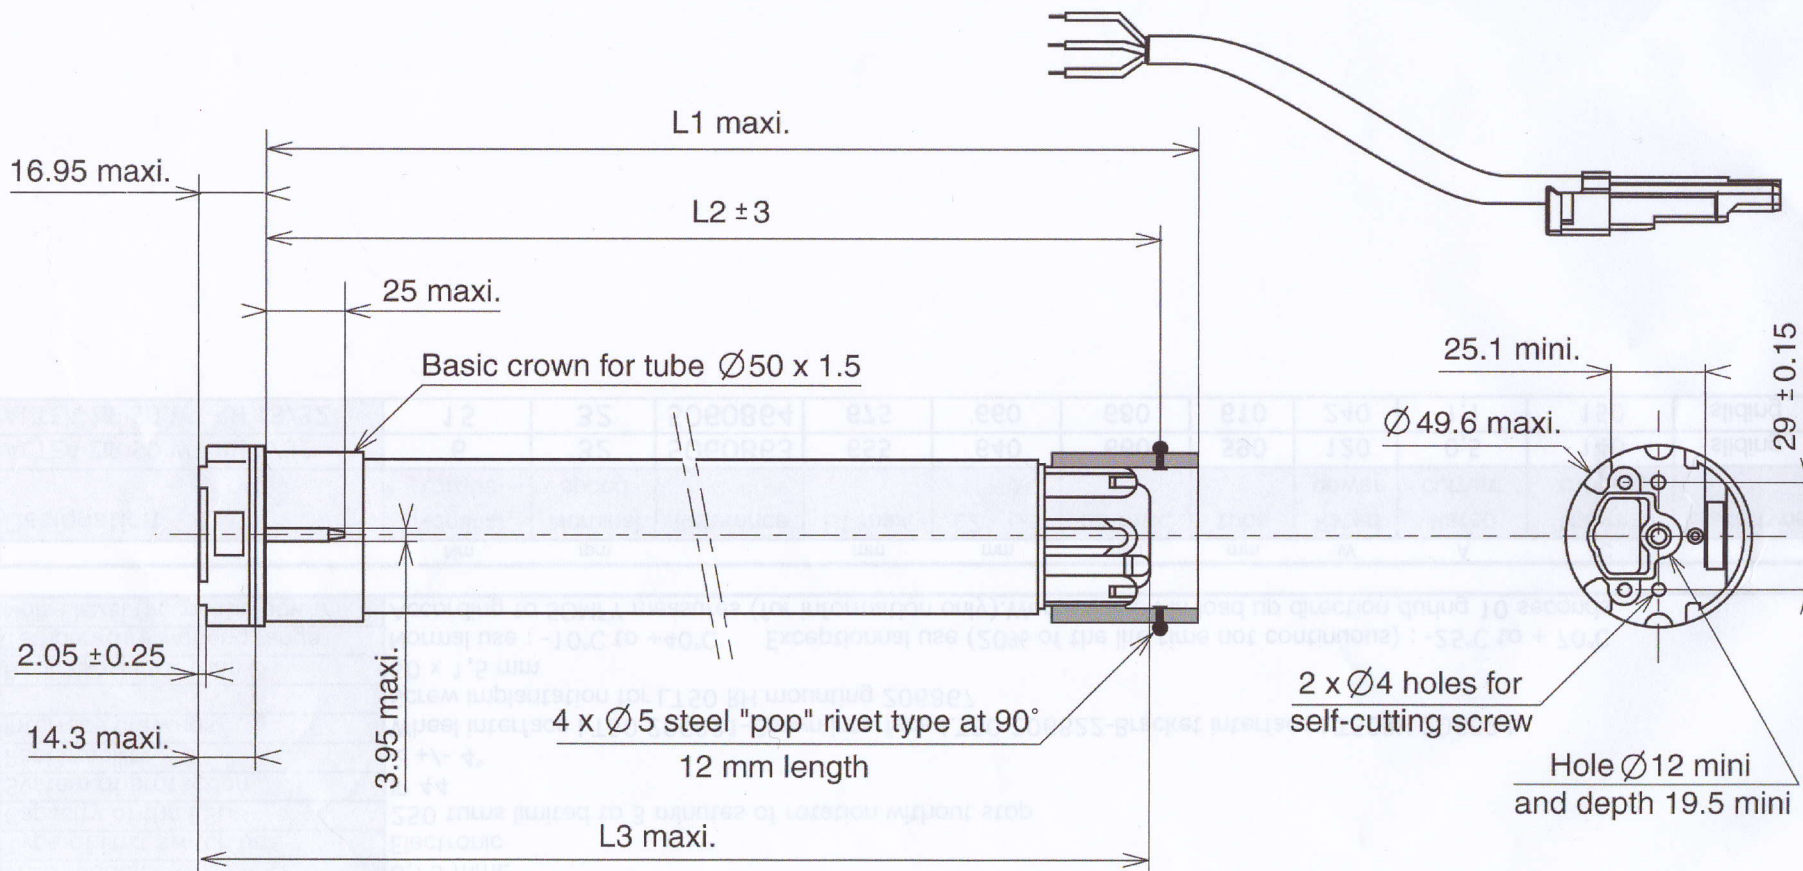

Name
Date

R&D

Eric Sermet

16/02/2009

QUALITY

Xavier Colet

17/02/2009

MARKETING

Olivier Miesch

16/02/09