

GDK 3000

Product reference	2 400 629
EAN Code	366084 900629 7
Pack dimensions (L x H x D)	85,5 x 34 x 13 (cm)
Weight	10,6 (kg)
Pack type	Colour box
Minimum order	1
Delivery mode	According to delivery (palette or box)

Cancels & replaces	Keasy 5
Guarantee	3 years
Marketing date	January 2006



MADE IN FRANCE

www.somfy.com




Content of the pack

- 1 motorisation
- 2 customisable remote controls**
- 1 bag of brown, blue, green clips
- 1 40W lamp
- 1 aluminium rail in 3 parts
- 2 fastening bars
- 1 lintel yoke
- 1 door yoke
- 1 linking arm
- 1 bag of accessories
- 1 installation manual



Scope of application

Max height:	Sectional door	2.20m
	Overlapping door	2.36m
Max surface of the door:		5 m ²
Max width of the door:		2.50m
Min height under lintel:		30mm
Min length of the garage:		3.22m
Number of cycles (opening/closing) per day		20
Operating temperature		-10°C / 40°C

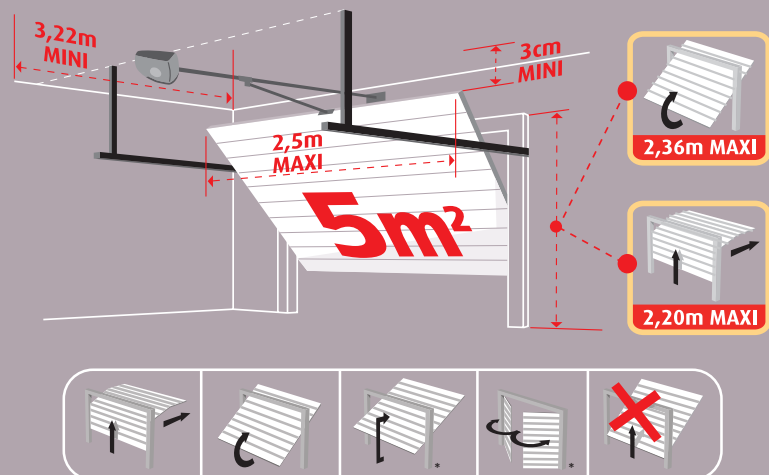

* With accessories in option

Arguments

- Fast, smooth, and silent opening: 15 sec to open a 2m high door.
- Possibility to connect all comfort and safety accessories: Automatic closing possible.
- In case of power failure, the backup battery (sold separately) allows operating the garage door.
- "Intrusion-free" closing for enhanced safety.
- Emergency operation: indoor manual release possible.

Functional characteristics

- **Obstacle detection safety:** Movement reversed against obstacle when closing and door stopped against obstacle when opening, facility fully compliant with standard EN 60335-2-95
- **Simplified settings: automatic adjustments of the door according to its characteristics** (dimensions, weight, upper and lower stop points...)
- **Lighting** (40 W) (40W) of your motorisation is integrated: it switches on automatically and fades out after 2 minutes.
- **Soft-Stop / Soft -Start:** Slows down at start and stop of opening and closing of the door.



Compliance with standards

This product meets strictly the provisions and main safety specifications imposed by the directive according to standard reference **EN 60335-2-95**. Declarations of compliance: www.somfy.com/CE

Technical specifications



Motor & Kit	Traction force	500 N
	Power supply voltage	230 V
	Type of motor	24 V
	Standby consumption	4.5 W max
	Track height	30 mm
	Fastening accessories and bolts	Included
	Linking arm	Straight
	Independent lighting	40 W, Spotlight R80/E27
	Lighting timeout	2 minutes
	Built-in electronics	yes
Built-in radio receiver	yes	
Customisable remote controls	x 2 – 2 channels	
Operating specifications	Radio frequency	433 MHz
	Maximum number of remotes	16
	Slow closing	yes
	Slow opening	yes
	Adjustable slow speed	yes
	Automatic mode	yes
Connectors for accessories	Photocells	yes
	Amber flashlight	yes / 15 W max
	Gate contact	yes
	Backup battery	yes
	Key switch	yes
	Wire code keypad	yes
	2-channel indoor wall switch	yes