

Outside Sensor Extension Box

| animeo Solo

| **animeo IB+**

| animeo IP

| animeo KNX

| animeo LON

SOLUTIONS FOR BUILDING CONTROL



Ref. 9001607

Interface between the sensor stations or individual sensors to the animeo IB+ Building Controller 4 zones (ref. 1822395) and IB+ Building Controller 8 zones (ref. 1822064)

It requires an external 24 V AC / DC power supply (ref. 1860093).


The Outside Sensor Extension Box (ref. 9001607) offers extension capabilities of 2 additional wind speed sensors and 4 sun sensors and can be used as an expander of the Outside Sensor Box (ref. 9001606).

Installation advantages

- > Only two cables (power supply 24 V AC/DC and data cable) must be laid to the outside. All wires easily integrated through spring clamp connectors.
- > Can directly be fixed to the sensor stations.
- > Up to 4 sun sensors and 2 wind speed sensors (standard or heated) can be connected to the Outside Extension Sensor Box.

Functional advantages

- > Easy and quick start-up in combination with animeo building control solutions.
- > Status display through LED's for clear monitoring of connected and functioning individual sensors.

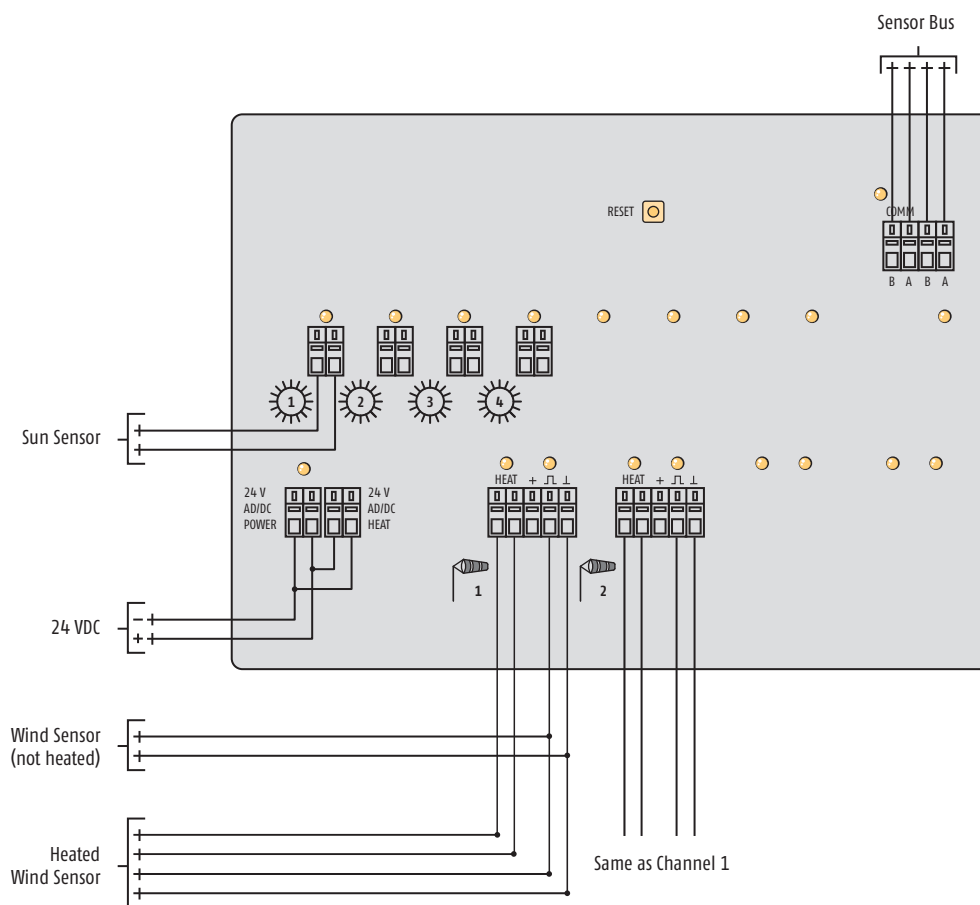

CHARACTERISTICS

Supply voltage	24 V AC/DC SELV
Stand-by current (IEC 62301)	100 mA
Terminals	Spring connectors
Operating temperature	- 30 °C to 70 °C
Relative humidity	max. 85 %
Material of housing	PC (Polycarbonate)
Housing dimensions (w x h x d)	255 x 210 x 100 mm
Weight	830 g
Degree of protection	IP 44
Protection class	III
Conformity	www.somfy.com/ce