

Soliris Sun Sensor

animeo Solo

animeo IB+

animeo IP

animeo KNX

animeo LON

SOLUTIONS FOR BUILDING CONTROL



Ref. 9154217

Sun sensor for the measuring of luminosity in connection with the animeo Solo 1 zone (ref. 1860143) and animeo Solo 2 zone (ref. 1860144).

Measurement output is displayed in Lux in the animeo building control solutions.

Installation advantages


- > Small unique design to allow the integration directly at the external façade.
- > Brackets available (ref. 9127888).
- > Spring clamp connectors for safe and solid wiring to the animeo Solo.

Functional advantages

- > Take the luminosity of an angle of 150° into account.
- > Up to max. 2 sun sensors can be used in combination with the animeo Solo (max. 1 sensor per zone).

Somfy Activites SA
50 Avenue du Nouveau Monde
74300 Cluses

www.somfy.com/projects

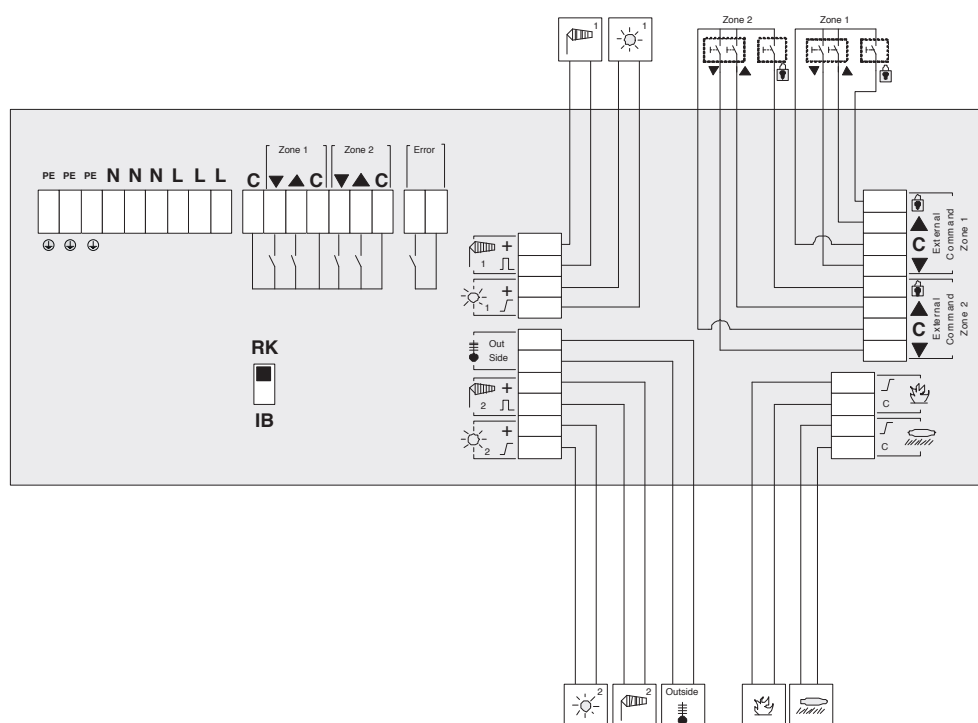

CHARACTERISTICS

Dimensions	34 × 88 × 47 mm
Degree of protection	IP 44
Wiring recommendations	2 × 0.8 mm ²
Angle position	150°
Weight	42 g
Protection class	III
Mounting bracket for Sun Sensor	ref. 9127888
Conformity	www.somfy.com/ce

2017/11/30