



30 - 03 - 2007

1810644 DMKI-FPTER1

designation	Telis 4 RTS Patio
reference	1810644
range	RTS New Collection

FUNCTIONS

Four channel hand held transmitter compatible with the RTS receivers range.

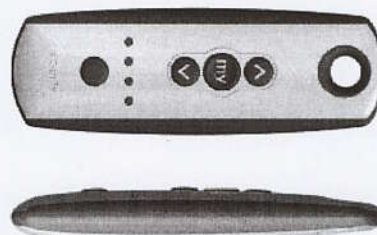

TECHNICAL SPECIFICATIONS

Box	Material	ABS and SEBS Shock resistant
	Color	Blue & White
	Size	145 x 49 x 22 mm
	Protection factor against solid & splashproof	IP 44
Battery	Voltage	3V
	Type	2430 Lithium
Battery life time (at ambient temperature)		3 years (4 actions of 1" per day)
Frequency		433.42 Mhz +/- 100 kHz
Radiated power		0dBm or 1 mW
Modulation type		ASK type A1
Protocole		RTS
Standard		EN 60730 - 2 - 1 EN 300220 - 3 EN 301489 - 3
Temperature range	Storage Working	- 20°C / + 70°C 0°C / + 60°C
Antenna		Integrated
Range (minimum guaranteed)		20 m with 2 reinforced concrete walls
Weight		approx. 70g

R&D

Name:

Date:

E. SERMET

18/04/2007

QUALITY

Name:

Date:

X. COLET

19/04/2007

EDITOR

Name:

Date:

F. BROZILLE

18-04-2007